

2.3VA EI 30-18 EI3018 Series 50/60Hz PCB Mount Transformers

Meisongbei



Features


- Vacuum filling
- Two compartments bobbins
- Self-extingFAUshing plastics UL 94 VO
- Degree of protection IP 00
- 80 grams weight



Applications

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

Physical Characteristics (Unit: mm)

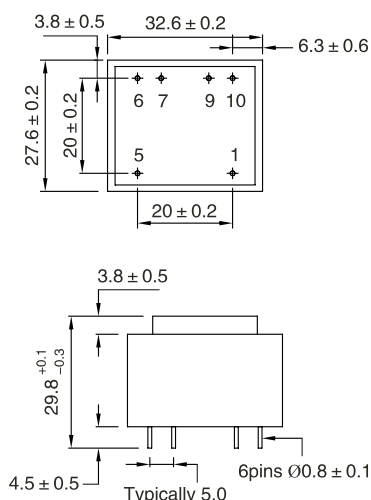


Recommended Drill-hole Diameter for 1.3mm pins



Technical Information

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN61558-2-6 certified (production on request)
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

1 Secondary winding



2 Secondary winding



Electrical Characteristics

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301801	6	383	10.5	T70B	2.3	EI301813	6	383	10.5	T70B	2.3
EI301802	9	256	15.7	T70B	2.3	EI301814	9	256	15.7	T70B	2.3
EI301803	12	192	21	T70B	2.3	EI301815	12	192	21	T70B	2.3
EI301804	15	153	25.9	T70B	2.3	EI301816	15	153	25.9	T70B	2.3
EI301805	18	128	31.4	T70B	2.3	EI301817	18	128	31.4	T70B	2.3
EI301806	24	96	41.9	T70B	2.3	EI301818	24	96	41.9	T70B	2.3
EI301807	2 x 6	2 x 192	2 x 10.5	T70B	2.3	EI301819	2 x 6	2 x 192	2 x 10.5	T70B	2.3
EI301808	2 x 9	2 x 128	2 x 15.7	T70B	2.3	EI301820	2 x 9	2 x 128	2 x 15.7	T70B	2.3
EI301809	2 x 12	2 x 96	2 x 25.9	T70B	2.3	EI301821	2 x 12	2 x 96	2 x 25.9	T70B	2.3
EI301810	2 x 15	2 x 77	2 x 21	T70B	2.3	EI301822	2 x 15	2 x 77	2 x 21	T70B	2.3
EI301811	2 x 18	2 x 64	2 x 31.4	T70B	2.3	EI301823	2 x 18	2 x 64	2 x 31.4	T70B	2.3
EI301812	2 x 24	2 x 48	2 x 41.9	T70B	2.3	EI301824	2 x 24	2 x 48	2 x 41.9	T70B	2.3