


# EE & EF CORES

**Meisongbei**

Material: M5K, M7K, M10K

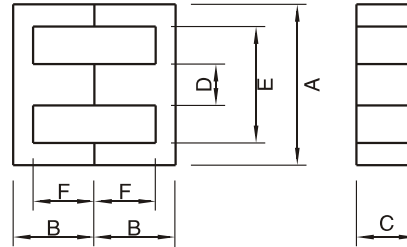

Type	Dimension(mm)						Effective Parameter				AL(nH/N <sup>2</sup> )			Weight (g)
	A	B	C	D	E min	F	C1 (mm <sup>-1</sup> )	Le (mm)	Ae (mm <sup>2</sup> )	Ve (mm <sup>3</sup> )	M5K (±25%)	M7K (±25%)	M10K (±25%)	
EE5	5.25±0.1	2.65±0.1	1.95±0.1	1.35±0.1	3.8	2.0±0.1	4.85	12.63	2.6	32.88			640	0.2
EE8.3	8.3±0.3	4.0±0.1	3.9±0.2	2.0±0.3	6.1	3.0±0.2	2.75	19.2	7	134	1200	1300	1500	0.7
EE10	10.2±0.3	5.5±0.1	4.75±0.15	2.45±0.15	7.9	4.2±0.15	2.16	26.1	12.1	315	1700	2000	2300	1.5
EE13	13.0±0.6	6.0±0.3	6.0±0.3	2.9±0.3	10.1	4.6±0.3	1.77	30.2	17.1	517	2200	2700	3100	2.7
EE16	16.0±0.3	7.4±0.3	5.0±0.3	4.0±0.2	11.8	5.2±0.3	1.8	34.8	19	670	2400	2800	3200	4.4
EF16	16.0±0.5	8.1±0.3	4.5±0.2	4.5±0.2	11.4	5.9±0.2	1.87	37.6	20.1	754	2300	2800	3200	4.5
EEL16	16.0±0.5	12.2±0.3	5.0±0.3	4.0±0.2	11.8	10.0±0.5	2.9	55.1	19	1048	1700	2100	2500	5.2
EE19	19.1±0.3	8.1±0.3	5.2±0.3	4.7±0.4	14.4	5.5±0.3	1.73	39.8	23	910	2600	3100	3600	4.8
EEL19	19.1±0.3	13.3±0.3	5.2±0.3	4.7±0.4	13.8	11.0±0.5	2.78	62.2	22.4	1393	1800	2300	2800	7.0
EEL20	20.1±0.3	13.6±0.2	5.0±0.3	5.0±0.3	14.9	11.4±0.3	2.82	62.5	23	1452	2200	2800	3500	8.0
EE20	20.0±0.4	10.6±0.3	4.8±0.3	4.8±0.3	12.3	6.6±0.3	1.71	47.1	27.6	1300	2700	3400	4000	6.9
EF20	20.0±0.4	9.9±0.2	5.9±0.5	5.9±0.4	14.1	7.2±0.2	1.38	43	31	1340	3300	4000	4700	7.5
EE22	22.0±0.4	9.1±0.5	6.0±0.5	6.0±0.5	16	5.3±0.4	1.16	42.1	36.2	1525	3900	4700	5600	7.6
EEL22	22.0±0.5	14.4±0.5	6.0±0.5	6.0±0.5	15.6	10.6±0.4	1.82	636	35	2220	2800	3500	4200	11.1
EE25	25.4±0.5	10.2±0.3	6.35±0.2	6.35±0.3	18.5	7.0±0.3	1.16	50	43	2193	4100	5100	6000	10.7
EF25	25.0±0.5	12.5±0.3	7.0±0.4	6.8±0.3	18.6	9.1±0.2	1.22	57.8	47.2	2700	4100	5100	6100	13
EEL25	25.4±0.5	16.3±0.5	6.6±0.2	6.6±0.2	18.9	13.0±0.5	1.9	76.7	40.4	3097	2800	3600	430	15.5