


EE & EF CORES

Meisongbei

Material: M3K, M2, M3

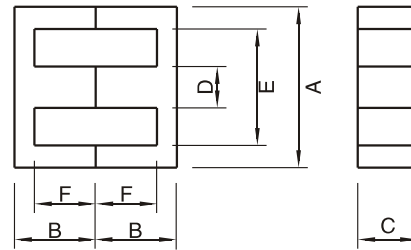

| Type | Dimension(mm) | | | | | | Effective Parameter | | | | AL(nH/N2) | | | Weight (g) |
|---------|---------------|-----------|----------|----------|-------|----------|------------------------|---------|-----------------------|-----------------------|------------|-----------|-----------|------------|
| | A | B | C | D | E min | F | C1 (mm ⁻¹) | Le (mm) | Ae (mm ²) | Ve (mm ³) | M3K (±25%) | M2 (±25%) | M3 (±25%) | |
| EE25A | 25.4±0.5 | 10.0±0.3 | 6.4±0.3 | 6.0±0.3 | 18.5 | 7.0±0.3 | 1.16 | 50 | 43 | 2193 | 2300 | 2100 | 1900 | 10.7 |
| EE25B | 25.4±0.5 | 10.0±0.3 | 6.8±0.2 | 6.0±0.3 | 18.5 | 7.0±0.3 | 1.117 | 50.7 | 42.4 | 2149 | 2300 | 2100 | 1900 | 14 |
| EF25 | 25.0±0.6 | 12.5±0.4 | 7.0±0.4 | 6.8±0.3 | 18.6 | 9.1±.3 | 1.22 | 57.8 | 47.2 | 2700 | 2300 | 2100 | 1900 | 13 |
| EE125 | 25.4±0.5 | 16.3±0.4 | 6.3±0.3 | 6.3±0.3 | 18.6 | 13.3±0.4 | 1.9 | 76.7 | 40.4 | 3097 | 1600 | 1400 | 1300 | 15.5 |
| EE26.5 | 26.5±0.7 | 10.8±0.3 | 11.0±0.3 | 7.2±0.3 | 19 | 6.8±0.3 | 1.36 | 77.6 | 57.1 | 4430 | 4000 | 3900 | 3600 | 22 |
| EE28 | 28.5±0.6 | 10.0±0.3 | 10.4±0.3 | 7.2±0.3 | 19 | 6.8±0.3 | 0.57 | 48.1 | 99.8 | 4801 | 4200 | 4000 | 4000 | 23.5 |
| EE128 | 28.0±0.7 | 17.1±0.3 | 10.4±0.3 | 7.1±0.3 | 18.9 | 12.8±0.4 | 0.9 | 74.4 | 87.5 | 6508.4 | 3100 | 2600 | 2400 | 35 |
| EE30/7 | 30.1±0.7 | 15.0±0.4 | 7.3±0.5 | 7.2±0.5 | 19.5 | 9.9±0.25 | 1.12 | 66.9 | 59.7 | 4000 | | | 2100 | 21 |
| EE30/11 | 30.0±0.5 | 15.0±0.4 | 10.7±0.3 | 7.2±0.5 | 19.5 | 9.9±0.25 | 0.86 | 57.8 | 110 | 6358 | | | 2800 | 32 |
| EE40 | 40.0±0.7 | 17.3±0.3 | 11.6±0.3 | 11.6±0.3 | 26.8 | 10.3±0.3 | 0.53 | 77.28 | 145.74 | 11262.77 | | | 4000 | 56 |
| EE42 | 42.0±0.7 | 21.2±0.4 | 15.0±0.4 | 12.3±0.4 | 29.5 | 9.9±0.25 | 0.6 | 97.8 | 180 | 17600 | 5300 | 4800 | 4200 | 88 |
| EE55A | 55.0±0.8 | 27.5±0.3 | 17.0±0.7 | 17.0±0.6 | 38 | 18.8±0.3 | 0.428 | 80 | 186 | 14880 | 4300 | 4000 | 3700 | 178 |
| EE55B | 55.0±2.0 | 27.8±0.6 | 20.9±0.5 | 17.0±0.5 | 37.5 | 18.7±0.7 | 0.35 | 123 | 354 | 43542 | 8000 | 6700 | 6500 | 210 |
| EE65A | 65.2±1.3 | 32.5±.3 | 19.6±0.3 | 19.6±0.3 | 44.2 | 22.5±0.3 | 0.373 | 146.8 | 393.1 | 57728.4 | | | 5800 | 280 |
| EE65B | 65.2±1.3 | 32.5±0.3 | 19.6±0.3 | 27.0±0.3 | 44.2 | 22.5±0.3 | 0.274 | 147 | 535 | 78700 | | | 7800 | 380 |
| EE70 | 70.5±1.0 | 35.5±0.5 | 24.5±0.6 | 16.7±0.5 | 48 | 24.6±0.6 | 0.344 | 159 | 461 | 73200 | | | 6500 | 370 |
| EE70B | 70.7±1.5 | 32.0±0.4 | 30.5±0.6 | 21.5±0.5 | 48 | 22.0±0.6 | 0.226 | 150 | 665 | 99800 | | | 9000 | 500 |
| EE80 | 80.0±0.8 | 37.95±0.4 | 20.4±0.4 | 20.0±0.4 | 60 | 28.0±0.3 | 0.446 | 183.5 | 399 | 73150 | | | 6100 | 368 |
| EE85 | 85.0±1.2 | 43.5±0.5 | 26.0±0.6 | 26.4±0.6 | 56 | 30.5±0.5 | 0.49 | 196.3 | 433 | 79150 | | | 7500 | 700 |
| EE100 | 100.0±2.0 | 60.0±0.6 | 28.0±1.0 | 28.0±1.0 | 71.5 | 46.5±1.2 | 0.349 | 271 | 775 | 209768 | | | 7800 | 1028 |
| EE110 | 110±2.0 | 55.0±0.6 | 36.0±1.0 | 36.0±1.0 | 75 | 37.0±1.2 | 0.212 | 274.5 | 1296 | 355750 | | | 13300 | 1796.5 |
| EE130 | 130.0±3.0 | 63.0±1.0 | 20.0±1.0 | 40.0±2.0 | 89 | 43.0±0.8 | 0.352 | 284 | 1600 | 454000 | | | 12000 | 2190 |
| EE140 | 140.0±3.0 | 53.0±1.0 | 35.0±1.0 | 35.0±1.0 | 100 | 35.0±0.6 | 0.216 | 259.3 | 1200.2 | 311212 | | | 7000 | 1550 |
| EE160 | 160.0±3.0 | 83.0±1.0 | 20.0±1.5 | 40.0±2.0 | 120 | 64.0±1.0 | 0.498 | 398 | 1600 | 637000 | | | 9000 | 2500 |
| EE185 | 185.0±3.0 | 77.0±1.5 | 27.5±1.0 | 53.0±1.0 | 128 | 50.0±1.5 | 0.24 | 370 | 1488 | 551000 | | | 12000 | 5700 |
| EE240 | 240.0±3.0 | 117.0±1.0 | 40.0±1.5 | 56.0±3.0 | 176 | 86.5±1.0 | 0.235 | 556.4 | 2359 | 1312421 | | | 12500 | 5900 |

SHANGHAI MEISONGBEI ELECTRONICS CO.,LTD

NO.528 Kangding Road,Jing'An,Shanghai Tel:0086-21-62883517 Fax:0086-21-62883519 www.meisongbei.com