



Features


- Vacuum filling
- Two compartments bobbins
- Self-extingFAUISHing plastics UL 94 VO
- Degree of protection IP 00
- 80 grams weight




Applications

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

Physical Characteristics (Unit: mm) Technical Information

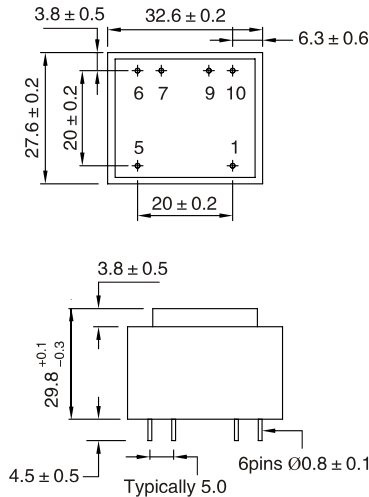

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN61558-2-6 certified (production on request)
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

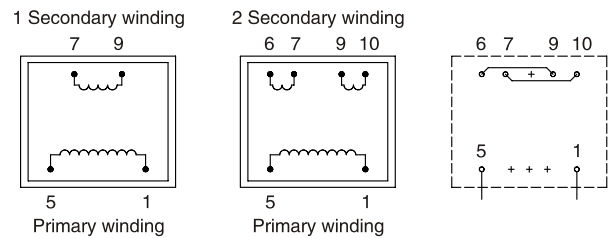

Recommended Drill-hole Diameter for 1.3mm pins

Electrical Characteristics

Primary Voltage: 230					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301801	6	383	10.5	T70B	2.3
EI301802	9	256	15.7	T70B	2.3
EI301803	12	192	21	T70B	2.3
EI301804	15	153	25.9	T70B	2.3
EI301805	18	128	31.4	T70B	2.3
EI301806	24	96	41.9	T70B	2.3
EI301807	2 x 6	2 x 192	2 x 10.5	T70B	2.3
EI301808	2 x 9	2 x 128	2 x 15.7	T70B	2.3
EI301809	2 x 12	2 x 96	2 x 25.9	T70B	2.3
EI301810	2 x 15	2 x 77	2 x 21	T70B	2.3
EI301811	2 x 18	2 x 64	2 x 31.4	T70B	2.3
EI301812	2 x 24	2 x 48	2 x 41.9	T70B	2.3

Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301813	6	383	10.5	T70B	2.3
EI301814	9	256	15.7	T70B	2.3
EI301815	12	192	21	T70B	2.3
EI301816	15	153	25.9	T70B	2.3
EI301817	18	128	31.4	T70B	2.3
EI301818	24	96	41.9	T70B	2.3
EI301819	2 x 6	2 x 192	2 x 10.5	T70B	2.3
EI301820	2 x 9	2 x 128	2 x 15.7	T70B	2.3
EI301821	2 x 12	2 x 96	2 x 25.9	T70B	2.3
EI301822	2 x 15	2 x 77	2 x 21	T70B	2.3
EI301823	2 x 18	2 x 64	2 x 31.4	T70B	2.3
EI301824	2 x 24	2 x 48	2 x 41.9	T70B	2.3