



**Features**


- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 58 grams weight




**Applications**

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

**Physical Characteristics (Unit: mm)      Technical Information**

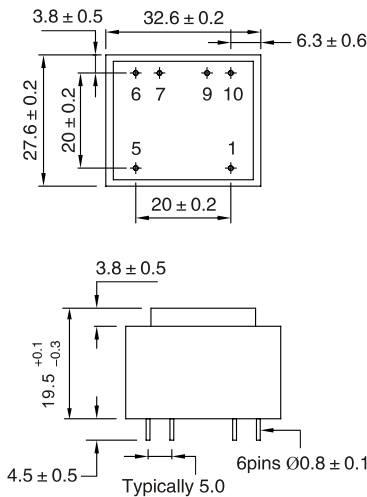

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V and 36 V models are VDE EN61558-2-6 certified (production on request)
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

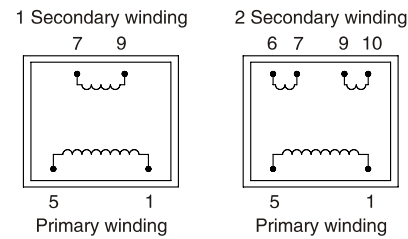

Recommended Drill-hole Diameter for 1.3mm pins

**Electrical Characteristics**

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI300801	6	133	8.5	T70B	0.8	EI301013	6	133	8.5	T70B	0.8
EI300802	9	89	12.5	T70B	0.8	EI301014	9	89	12.5	T70B	0.8
EI300803	12	66	16.3	T70B	0.8	EI301015	12	66	16.3	T70B	0.8
EI300804	15	53	20.2	T70B	0.8	EI301016	15	53	20.2	T70B	0.8
EI300805	18	44	24.2	T70B	0.8	EI301017	18	44	24.2	T70B	0.8
EI300806	24	33	32.2	T70B	0.8	EI301018	24	33	32.2	T70B	0.8
EI300807	2 x 6	2 x 66	2 x 8.3	T70B	0.8	EI301019	2 x 6	2 x 66	2 x 8.3	T70B	0.8
EI300808	2 x 9	2 x 44	2 x 11.9	T70B	0.8	EI301020	2 x 9	2 x 53	2 x 11.9	T70B	0.8
EI300809	2 x 12	2 x 33	2 x 16.2	T70B	0.8	EI301021	2 x 12	2 x 33	2 x 16.2	T70B	0.8
EI300810	2 x 15	2 x 27	2 x 20.4	T70B	0.8	EI301022	2 x 15	2 x 27	2 x 20.4	T70B	0.8
EI300811	2 x 18	2 x 22	2 x 24.2	T70B	0.8	EI301023	2 x 18	2 x 22	2 x 24.2	T70B	0.8
EI300812	2 x 24	2 x 17	2 x 32.1	T70B	0.8	EI301024	2 x 24	2 x 17	2 x 32.1	T70B	0.8