



Features


- Vacuum filling
- Two compartments bobbins
- Self-extingFAUISHing plastics UL 94 VO
- Degree of protection IP 00
- 80 grams weight



Applications

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom

Physical Characteristics (Unit: mm)

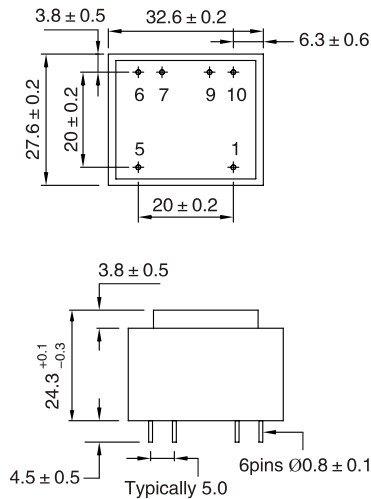


Recommended Drill-hole Diameter for 1.3mm pins



Technical Information

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN61558-2-6 certified (production on request)
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

1 Secondary winding



2 Secondary winding



Electrical Characteristics

Primary Voltage: 230					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301201	6	250	9.7	T70B	1.5
EI301202	9	167	14.5	T70B	1.5
EI301203	12	125	19.3	T70B	1.5
EI301204	15	100	24.2	T70B	1.5
EI301205	18	83	29.8	T70B	1.5
EI301206	24	63	38.6	T70B	1.5
EI301207	2 x 6	2 x 125	2 x 9.7	T70B	1.5
EI301208	2 x 9	2 x 83	2 x 14.5	T70B	1.5
EI301209	2 x 12	2 x 63	2 x 19.3	T70B	1.5
EI301210	2 x 15	2 x 50	2 x 24.2	T70B	1.5
EI301211	2 x 18	2 x 42	2 x 29.8	T70B	1.5
EI301212	2 x 24	2 x 31	2 x 38.6	T70B	1.5

Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301213	6	250	9.7	T70B	1.5
EI301214	9	167	14.5	T70B	1.5
EI301215	12	125	19.3	T70B	1.5
EI301216	15	100	24.2	T70B	1.5
EI301217	18	83	29.8	T70B	1.5
EI301218	24	63	38.6	T70B	1.5
EI301219	2 x 6	2 x 125	2 x 9.7	T70B	1.5
EI301220	2 x 9	2 x 83	2 x 14.5	T70B	1.5
EI301221	2 x 12	2 x 63	2 x 19.3	T70B	1.5
EI301222	2 x 15	2 x 50	2 x 24.2	T70B	1.5
EI301223	2 x 18	2 x 42	2 x 29.8	T70B	1.5
EI301224	2 x 24	2 x 31	2 x 38.6	T70B	1.5