

# SMD Semi-Shielded Power Inductor - SNR3015 Series *Meisongbei*



## Features

- Magnetic-resin Shielded reduces noise
- Inductance Range: 1uH - 47uH
- Rated current up to 2.32A
- Small and very Thin inductor


## Application

- LED Lighting,
- Automotive systems,
- Notebooks, desktop computers, servers, graphic cards.

## General Specifications

- Storage temp range: -40°C to +85°C
- Operating temp range: -40°C to +125°C
- Resistance to Soldering Heat +260°C for 5-10 Sec.

## ► Dimensions & Configurations (Unit:mm)

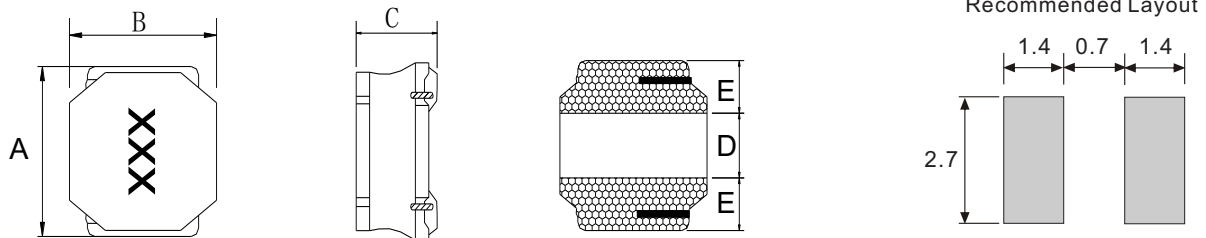

Type	A	B	C	D	E
SNR3015	3.0±0.2	3.0±0.2	1.7Max	1.2±0.2	0.9±0.2

## ► Electrical Characteristics For SNR3015 Series

Part Number	Inductance [uH]	DCR(max) [mΩ]	Isat [A] (Max.)
SNR3015-1R0N	1.0±30%	48	2.32
SNR3015-1R5N	1.5±30%	65	2.10
SNR3015-2R2N	2.2±30%	78	1.60
SNR3015-3R3M	3.3±20%	104	1.30
SNR3015-4R7M	4.7±20%	160	1.10
SNR3015-6R8M	6.8±20%	234	0.85
SNR3015-100M	10±20%	338	0.70
SNR3015-150M	15±20%	439	0.60
SNR3015-220M	22±20%	600	0.52
SNR3015-330M	33±20%	1066	0.44
SNR3015-470M	47±20%	1600	0.35

- Inductance tested at 100kHz, 1.0Vrms, 0.0Adc
- Heat Rating Current (Irms): Current that cause the temperature 40°C rise from 25°C
- Saturation Current (Isat): DC current at which the inductance drops 30% from its value without current