
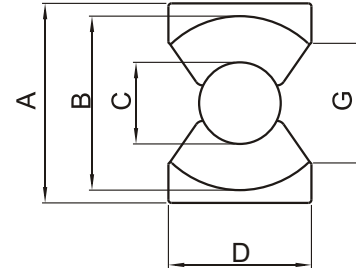


Material: M3

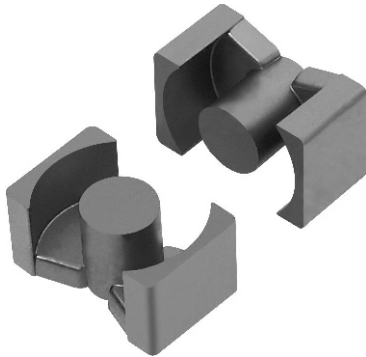

Type	Dimension(mm)						
	A	B	C	D	E	F	G min
PQ2016	20.5±0.40	18.00±0.40	8.80±.20	14.00±0.40	8.20±0.20	5.20±0.20	12.00
PQ2020	20.5±0.40	18.00±0.40	8.80±0.20	14.00±0.40	10.20±0.20	7.20±0.20	12.00
PQ2620	26.5±0.50	22.50±0.50	12.00±0.20	19.00±0.50	10.20±0.20	5.80±0.20	15.50
PQ2625	26.5±0.50	22.5±0.50	12.00±0.20	19.00±0.50	12.40±0.20	8.10±0.20	15.50
PQ3220	32.00±0.60	27.50±0.50	13.50±0.30	22.00±0.50	10.30±0.20	5.80±0.20	19.00
PQ3225	32.00±0.60	27.50±0.50	13.50±0.30	22.00±0.30	12.70±0.20	8.20±0.20	19.00
PQ3230	32.00±0.60	27.50±0.50	13.50±0.30	22.00±0.50	15.20±0.20	10.70±0.20	19.00
PQ3535	35.20±0.60	32.00±0.60	14.20±0.30	26.00±0.60	17.40±0.20	12.50±0.20	23.50
PQ4040	40.50±0.90	37.00±0.80	14.70±0.40	28.00±0.60	19.90±0.20	14.80±0.20	27.50
PQ5050	50.00±1.20	44.00±1.00	19.80±0.40	32.00±0.70	25.00±0.20	19.10±0.20	31.50

Type	Effective Parameter				AL(nH/N <sup>2</sup> )	Weight(g)
	C1 (mm <sup>-1</sup> )	Le (mm)	Ae (mm <sup>2</sup> )	Ve (mm <sup>3</sup> )	M3 (±25%)	
PQ2016	0.605	37.4	62	2310.0	3880	13
PQ2020	0.738	45.4	62	2790	3150	15
PQ2620	0.391	46.3	119	5490	6170	31
PQ2625	0.472	55.5	118	6530	5250	36
PQ3220	0.326	55.5	170	9420	6700	42
PQ3225	0.404	65.0	161	10465	5200	50
PQ3230	0.464	74.6	161	11970	5140	56
PQ3535	0.448	87.9	196	17260	4860	69
PQ4040	0.508	101.9	201	20450	4300	91
PQ5050	0.346	113.0	328	37238	6720	187