

22VA EI 60-21 EI60218 Series 50/60Hz PCB Mount Transformers

Meisongbei



Features


- Vacuum filling
- Two compartments bobbins
- Self-extingFAUshing plastics UL 94 VO
- Degree of protection IP 00
- 550 grams weight



Applications

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


Physical Characteristics (Unit: mm)

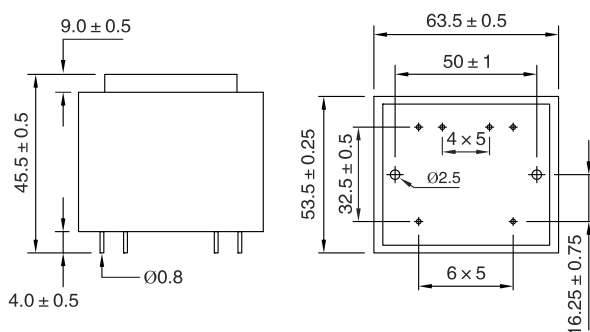

Recommended Drill-hole Diameter for 1.3mm pins
Recommended Drill-hole Diameter for Mountings=4 mm

Technical Information

- Resin class B CEI 85 (20000 h testing to CEI 126)
- Fuse protection on secondary side to be assumed by customer
- 30 V and 36V models are VDE EN61558-2-6 certified (production on request)
- Insulation voltage 4 KV
- 100% tested production
- Certification : CCA procedure on request

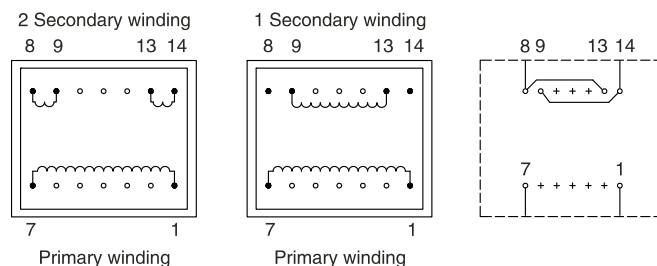

Electrical Characteristics

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI602101	6	3667	6.8	T50B	22	EI602113	6	3667	6.8	T50B	22
EI602102	9	2444	10.3	T50B	22	EI602114	9	2444	10.3	T50B	22
EI602103	12	1833	13.7	T50B	22	EI602115	12	1833	13.7	T50B	22
EI602104	15	1467	17.1	T50B	22	EI602116	15	1467	17.1	T50B	22
EI602105	18	1222	20.5	T50B	22	EI602117	18	1222	20.5	T50B	22
EI602106	24	917	27.3	T50B	22	EI602118	24	917	27.3	T50B	22
EI602107	2 x 6	2 x 1833	2 x 6.8	T50B	22	EI602119	2 x 6	2 x 1833	2 x 6.8	T50B	22
EI602108	2 x 9	2 x 1222	2 x 10.3	T50B	22	EI602120	2 x 9	2 x 1222	2 x 10.3	T50B	22
EI602109	2 x 12	2 x 917	2 x 13.7	T50B	22	EI602121	2 x 12	2 x 917	2 x 13.7	T50B	22
EI602110	2 x 15	2 x 733	2 x 17.1	T50B	22	EI602122	2 x 15	2 x 733	2 x 17.1	T50B	22
EI602111	2 x 18	2 x 611	2 x 20.5	T50B	22	EI602123	2 x 18	2 x 611	2 x 20.5	T50B	22
EI602112	2 x 24	2 x 458	2 x 27.3	T50B	22	EI602124	2 x 24	2 x 458	2 x 27.3	T50B	22