



Features



- With reliable flexible cable fixing, developed in-house
- Pre-fixing cable system facilitates the assembly process
- Cable clamping protection
- Classification of the plastic housing: UL94 V0
- Core material: NiZn

Application:



- PCs, monitors, Audio equipment
- HDDs, Digital telephones
- Electronic musical instruments
- Video games, copiers, facsimiles



Dimensions and Characteristics Specification






Part Number	Impedance (Ω)		Dimensions (mm)				Cable Dia Max. (mm)
	25MHz	100MHz	A (± 1)	B (± 1)	C (± 1)	D (± 1)	
SF-35A	90	130	13.0	11.8	3.5	25.5	3.5
SF-35B	55	130	13.0	11.8	5.0	25.5	5.0
SF-70A	50	110	17.0	15.0	7.0	30.0	7.0
SF-90A	60	130	19.5	18.4	9.0	35.0	9.0





Part Number	Impedance (Ω)		Dimensions (mm)					Cable Dia Max. (mm)
	25MHz	100MHz	A (± 1)	B (± 1)	C (± 1)	D (± 1)	E (± 1)	
SF-70B	35	60	15.5	15.0	7.0	18.5	22.0	7.0
SF-90B	60	130	19.5	19.5	9.0	31.0	35.0	9.0
SF-110B	45	115	21.0	20.0	11.0	32.0	36.0	11.0
SF-130B	55	110	31.0	30.5	13.0	34.0	39.5	13.0

► Dimensions and Characteristics Specification

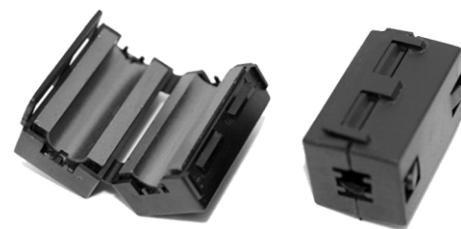

Part Number	Impedance (Ω)		Dimensions (mm)				Cable Dia Max. (mm)
	25MHz	100MHz	A (± 1)	B (± 1)	C (± 1)	D (± 1)	
SF-65	120	230	20.5	19.0	6.5	32.5	6.5
SF-100A	90	180	25.5	24.0	10.0	32.5	10.0



Part Number	Impedance (Ω)		Dimensions (mm)					Cable Dia Max. (mm)
	25MHz	100MHz	A (± 1)	B (± 1)	C (± 1)	D (± 1)	E (± 1)	
SF-80A	35	80	19.8	22.5	8.0	16.5	23.0	8.0
SF-80B	40	100	19.8	22.5	8.0	20.0	26.0	8.0