
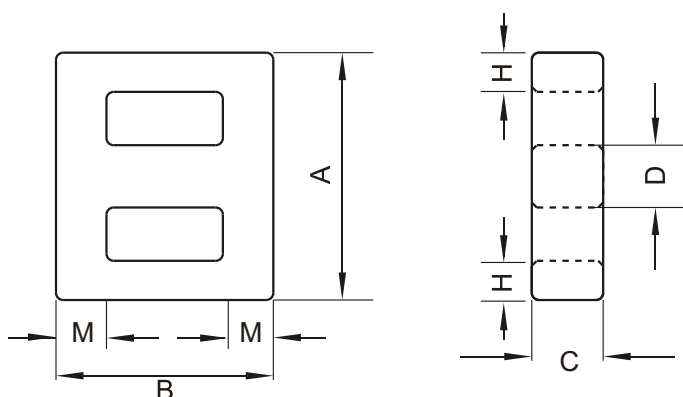


Material: M5K, M7K, M10K, M12K



Type	Dimension(mm)						Weight(g)
	A	B	C	D	H	M	
ET20	20.10±0.50	20.10±0.50	4.4±0.3	3.9±0.3	2.0±0.20	2.0±0.20	4.3
ET22	23.50±0.50	22.00±0.30	3.5±0.2	3.8±0.1	2.2±0.15	2.2±0.15	4.8
ET24	24.20±0.50	24.20±0.50	4.0±0.3	4.0±0.3	2.4±0.15	2.4±0.15	6.1
ET25	24.60±0.30	24.80±0.30	7.0±0.2	6.9±0.2	2.5±0.15	2.5±0.15	13
ET26	26.00±0.40	26.00±0.40	4.5±0.3	4.5±0.3	2.5±0.15	2.5±0.15	6.5
ET28	28.45±0.55	28.45±0.55	5.0±0.3	5.0±0.3	2.9±0.20	2.9±0.20	10
ET29	29.00±0.30	30.00±0.30	5.0±0.3	5.0±0.3	2.9±0.20	2.9±0.20	10.5
ET35	35.30±0.60	35.30±0.60	7.5±0.3	7.3±0.3	4.0±0.20	4.0±0.20	25.1

Type	Effective Parameter				AL(nH/N²)			
	C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	M5K (±25%)	M7K (±25%)	M10K (±25%)	M12K (±25%)
ET20	2.96	52.1	17.6	917	2000	2700	3600	4400
ET22	5	66.6	13.5	899	1700	2000	3000	3500
ET24	3.42	61	17.8	1090	2000	2700	3600	4400
ET25	3.24	63	20	1400	2500	3000	4000	4600
ET26	3.12	66	21.1	1395	2200	2800	3600	4000
ET28	2.61	71.4	27.4	1950	2600	3600	4500	5400
ET29	2.67	74.5	27.9	2070	2600	3600	4500	5400
ET35	1.48	86.7	58.6	5080	4000	5000	6400	8500