



Features

- PBT UL94-V0 Case
- Insulation: Epoxy Encapsulated
- Dielectric Resistance: 1000 M ohms @ 500 Vdc

General Specifications


- Operating temp range: -40°C to +85°C
- Storage temp range: -40°C to +85°C

Applications


- Energy Meter Power transducer
- Electronical monitoring system



► Dimensions & Configurations (Unit:mm)

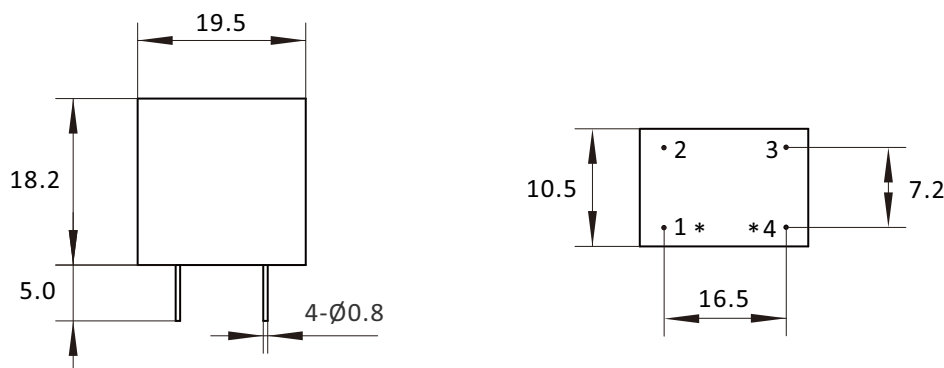

► Schematic

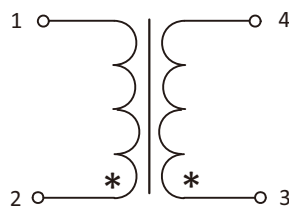

► Electrical Characteristics @ 25°C

Part Number	Rated Primary Current	Rated Secondary Current	Turns ratio	Load Resistance	Linearity	Isolation Voltage
MPT202A	2mA	2mA	1000:1000	50Ω	0.2%	3000VAC