

0.6VA Encapsulated Transformers - EI3005 Series

Meisongbei



Features



- Frequency 50/60Hz
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength 4200Vrms
- Class B (130°C) Insulation material
- 100% Production Tested
- Operating temper range: -40°C to +70°C

Applications


- Medical equipments
- Industrial equipments
- Test equipments
- Avionics & telecom



Physical Characteristics (Unit: mm)

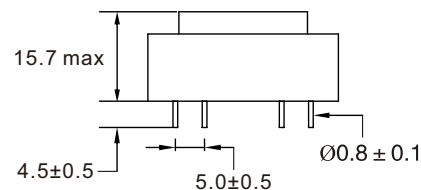


1 Secondary winding



Primary winding

2 Secondary winding



Primary winding

Electrical Characteristics For EI30-5 Series

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI300501	6	100	9.94	T 70 B	0.6	EI300513	6	100	9.94	T 70 B	0.6
EI300502	9	66	14.95	T 70 B	0.6	EI300514	9	66	14.95	T 70 B	0.6
EI300503	12	50	19.9	T 70 B	0.6	EI300515	12	50	19.9	T 70 B	0.6
EI300504	15	40	24.9	T 70 B	0.6	EI300516	15	40	24.9	T 70 B	0.6
EI300505	18	33	29.9	T 70 B	0.6	EI300517	18	33	29.9	T 70 B	0.6
EI300506	24	25	39.8	T 70 B	0.6	EI300518	24	25	39.8	T 70 B	0.6
EI300507	2 x 6	2 x 50	2 x 9.94	T 70 B	0.6	EI300519	2 x 6	2 x 50	2 x 9.94	T 70 B	0.6
EI300508	2 x 9	2 x 33	2 x 14.95	T 70 B	0.6	EI300520	2 x 9	2 x 33	2 x 14.95	T 70 B	0.6
EI300509	2 x 12	2 x 25	2 x 19.9	T 70 B	0.6	EI300521	2 x 12	2 x 25	2 x 19.9	T 70 B	0.6
EI300510	2 x 15	2 x 20	2 x 24.9	T 70 B	0.6	EI300522	2 x 15	2 x 20	2 x 24.9	T 70 B	0.6
EI300511	2 x 18	2 x 17	2 x 29.9	T 70 B	0.6	EI300523	2 x 18	2 x 17	2 x 29.9	T 70 B	0.6
EI300512	2 x 24	2 x 12	2 x 39.8	T 70 B	0.6	EI300524	2 x 24	2 x 12	2 x 39.8	T 70 B	0.6