


2VA Encapsulated Transformers - EI3015 Series

Meisongbei

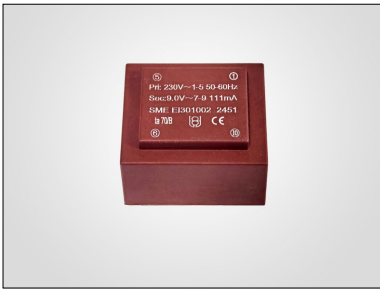

Features



- Frequency 50/60Hz
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength 4200Vrms
- Class B (130°C) Insulation material
- 100% Production Tested
- Operating temper range: -40°C to +70°C

Applications


- Medical equipments
- Industrial equipments
- Test equipments
- Avionics & telecom



Physical Characteristics (Unit: mm)

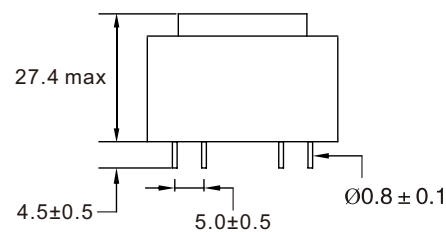


1 Secondary winding



Primary winding

2 Secondary winding



Primary winding

Electrical Characteristics For EI30-15.5 Series

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI301501	6	333	10.4	T 70 B	2	EI301513	6	333	10.4	T 70 B	2
EI301502	9	222	15.5	T 70 B	2	EI301514	9	222	15.5	T 70 B	2
EI301503	12	167	20.7	T 70 B	2	EI301515	12	167	20.7	T 70 B	2
EI301504	15	133	25.8	T 70 B	2	EI301516	15	133	25.8	T 70 B	2
EI301505	18	111	30.8	T 70 B	2	EI301517	18	111	30.8	T 70 B	2
EI301506	24	83	41.4	T 70 B	2	EI301518	24	83	41.4	T 70 B	2
EI301507	2 x 6	2 x 167	2 x 10.4	T 70 B	2	EI301519	2 x 6	2 x 167	2 x 10.4	T 70 B	2
EI301508	2 x 9	2 x 111	2 x 15.4	T 70 B	2	EI301520	2 x 9	2 x 111	2 x 15.4	T 70 B	2
EI301509	2 x 12	2 x 83	2 x 20.7	T 70 B	2	EI301521	2 x 12	2 x 83	2 x 20.7	T 70 B	2
EI301510	2 x 15	2 x 67	2 x 25.8	T 70 B	2	EI301522	2 x 15	2 x 67	2 x 25.8	T 70 B	2
EI301511	2 x 18	2 x 56	2 x 30.8	T 70 B	2	EI301523	2 x 18	2 x 56	2 x 30.8	T 70 B	2
EI301512	2 x 24	2 x 42	2 x 41.4	T 70 B	2	EI301524	2 x 24	2 x 42	2 x 41.4	T 70 B	2