

3.2VA Encapsulated Transformers - EI3813 Series

Meisongbei



Features





- Frequency 50/60Hz
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength 4200Vrms
- Class B (130°C) Insulation material
- 100% Production Tested
- Operating temper range: -40°C to +70°C

Applications

- Medical equipments
- Industrial equipments
- Test equipments
- Avionics & telecom



Physical Characteristics (Unit: mm)

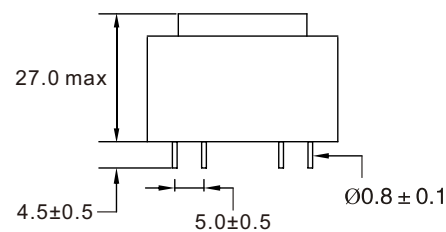

Electrical Characteristics For EI38-13.6 Series

Primary Voltage: 230						Primary Voltage: 115					
Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)	Part Number	Secondary voltage (V)	Secondary Current (mA)	No-load voltage (V)	Ambient Temperature (°C)	Rating (VA)
EI381301	6	533	8	T 70 B	3.2	EI381313	6	533	8	T 70 B	3.2
EI381302	9	356	12	T 70 B	3.2	EI381314	9	356	12	T 70 B	3.2
EI381303	12	267	16	T 70 B	3.2	EI381315	12	267	16	T 70 B	3.2
EI381304	15	213	20	T 70 B	3.2	EI381316	15	213	20	T 70 B	3.2
EI381305	18	178	24.1	T 70 B	3.2	EI381317	18	178	24.1	T 70 B	3.2
EI381306	24	133	32.1	T 70 B	3.2	EI381318	24	133	32.1	T 70 B	3.2
EI381307	2 x 6	2 x 267	2 x 8	T 70 B	3.2	EI381319	2 x 6	2 x 267	2 x 8	T 70 B	3.2
EI381308	2 x 9	2 x 178	2 x 12	T 70 B	3.2	EI381320	2 x 9	2 x 178	2 x 12	T 70 B	3.2
EI381309	2 x 12	2 x 133	2 x 16	T 70 B	3.2	EI381321	2 x 12	2 x 133	2 x 16	T 70 B	3.2
EI381310	2 x 15	2 x 107	2 x 20	T 70 B	3.2	EI381322	2 x 15	2 x 107	2 x 20	T 70 B	3.2
EI381311	2 x 18	2 x 89	2 x 24	T 70 B	3.2	EI381323	2 x 18	2 x 89	2 x 24	T 70 B	3.2
EI381312	2 x 24	2 x 67	2 x 32.1	T 70 B	3.2	EI381324	2 x 24	2 x 67	2 x 32.1	T 70 B	3.2